

Car Park Line Thermoplastic Road Marking Machine Marking Width 50-300mm

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: WAGE
- Certification: EMS OHSMS
- Model Number: HG-VM
- Minimum Order Quantity: 1 set
- Price: 6200 to 9250usd
- Packaging Details: box
- Delivery Time: 1 to 3 weeks
- Payment Terms: T/T, Western Union, MoneyGram, L/C
- Supply Ability: 10 set per week



Product Specification

- Paint Tank: 120L
- Dispenser: 12kg
- Bulge Thickness: 3 -5 Mm Adjusted
- Line Width: 15 20 30 45cm
- Application: Highway, Road, Parking Lot
- Dimension: 1200*600*1000mm
- Heating Time: 5-10min
- Marking Precision: ± 1 mm
- Marking Speed: 0-6m/min
- Marking Temperature: 200-400
- Marking Thickness: 1-2mm
- Marking Type: Line, Arrow, Text, Logo
- Marking Width: 50-300mm
- Material: Thermoplastic
- Power Supply: Electricity

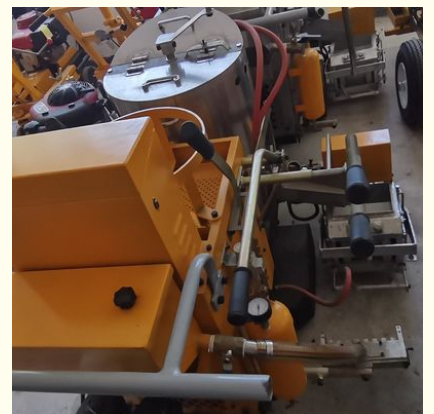

Product Description

Thermoplastic Vibration line Road Line Marking Machine for noise marking

Paint Tank:	120L	Dispenser:	12kg
Bulge Thickness:	3 -5 Mm Adjusted	Line Width:	15, 20, 30, 45cm
Application:	Highway, Road, Parking Lot	Dimension:	1200*600*1000mm
Heating Time:	5-10min	Marking Precision:	±1mm
Marking Speed:	0-6m/min	Marking Temperature:	200-400
Marking Thickness:	1-2mm	Marking Type:	Line, Arrow, Text, Logo
Marking Width:	50-300mm	Material:	Thermoplastic
Power Supply:	Electricity	Product Name:	Thermoplastic Road Marking Machine



WAGE Vibration road line marking machine has the following functional:

1. Adopt automatic oil pressure stepless speed change driving mode, automatic walking, to ensure uniform and efficient construction effect;
2. The scribe adopts stainless steel insulating material coatings barrel and inserting manual mixing device to ensure the best temperature and shape of the melt.
3. Unique marking hopper, which makes the shape, spacing and height of marking protrusion precise and accurate, makes the marking of hot melt oscillation complete at one time, and has strong wear resistance and impact resistance.
4. Synchronized clutch glass bead sprayer makes the glass beads more evenly scattered on the marking line.
5. It is equipped with speed regulating gear shifting device and rear wheel positioning system to ensure that the equipment is fixed and straight ahead.

Parameters:

	HG-VM
motor	5.5HP Gasoline
moving speed	12km/h
Grade ability	15°MAX 15°
cylinder capacity	120kg/桶
Glass Micro sphere cylinder capacity	12kg/箱
Bulge thickness	3-5mm(adjustment)
standard width	150mm
size options	150/200/300/450mm(marking scoops replacement)
size (L*W*H)mm	1400*1100*1200mm
Weight	210kg



Main parts:



Dispenser



Liner controller



Shoe



Honda Gasoline

Construction spot:



Contact info:

Ms. Rita QU

Xi'an Wage Traffic Infrastructure Installation Co.,LTD

Mail: rita@wagetrtraffic.com, wagetrtraffic@hotmail.com

Cell/ Whatsapp: +86 15591818803

Add:Room 401, Unit 2, Bilding 2, Shenglong Plaza, Weiyang Road, Xi'an, 710016, Shaanxi, China



Xian WAGE Traffic Infrastructure Installation Co., Ltd.



+86 15591818803



rita@wagetrtraffic.com



wagetrtraffic.com

Room 401, Unit 2, Biulding 2, Shenglong Plaza, Weiyang Road, Xi'an, 710016, Shaanxi, China