



## Battery Pushing Thermoplastic Road Line Marking Machine For Convex Profile Line

Our Product Introduction

for more products please visit us on [wagetraffic.com](http://wagetraffic.com)

### Basic Information

- Place of Origin: China
- Brand Name: WAGE
- Certification: EMS OHSMS
- Model Number: HG-DVM
- Minimum Order Quantity: 1 set
- Price: 5000-8000USD
- Packaging Details: box
- Delivery Time: 1 to 3 weeks
- Payment Terms: T/T, Western Union, MoneyGram, L/C
- Supply Ability: 10 set per week



### Product Specification

- Paint Type: Thermoplastic
- Marking Type: Noice Marking
- Paint Tank: 55L
- Dispenser: 10kg
- Bulge Thichness: 3 -5 Mm Adjusted
- Line Width: 15 20 30 45cm
- Highlight: thermoplastic road marking machine,  
battery pushing thermoplastic machine,  
convex profile line marking machine



### More Images



## Product Description

battery driving Thermoplastic convex / Vibration line Road Line Marking Machine for noise marking

Vibration marking is a kind of marking which is widely used in developed countries. Its shape is concave and convex. When a car passes by, it will have a "boom" sound. It has a good warning and reminding effect on the driver, so it is also called noise markin



### **WAGE Vibration road line marking machine has the following functional:**

1. Adopt automatic oil pressure stepless speed change driving mode, automatic walking, to ensure uniform and efficient construction effect;
2. The scribe adopts stainless steel insulating material coatings barrel and inserting manual mixing device to ensure the best temperature and shape of the melt.
3. Unique marking hopper, which makes the shape, spacing and height of marking protrusion precise and accurate, makes the marking of hot melt oscillation complete at one time, and has strong wear resistance and impact resistance.
4. Synchronized clutch glass bead sprayer makes the glass beads more evenly scattered on the marking line.
5. It is equipped with speed regulating gear shifting device and rear wheel positioning system to ensure that the equipment is fixed and straight ahead.



### **Parameters:**

|                                      |                                               |
|--------------------------------------|-----------------------------------------------|
|                                      | HG-DVM                                        |
| motor                                | Battery                                       |
| moving speed                         | 12km/h                                        |
| Grade ability                        | 15°MAX 15°                                    |
| cylinder capacity                    | 55L/tank                                      |
| Glass Micro sphere cylinder capacity | 10L/tank                                      |
| Bulge thickness                      | 3-5mm(adjustment)                             |
| standard width                       | 150mm                                         |
| size options                         | 150/200/300/450mm(marking scoops replacement) |
| size (L*W*H)mm                       | 1250*900*1150mm                               |
| Weight                               | 190kg                                         |


### **Main parts:**



**Controller**

**Dispenser**



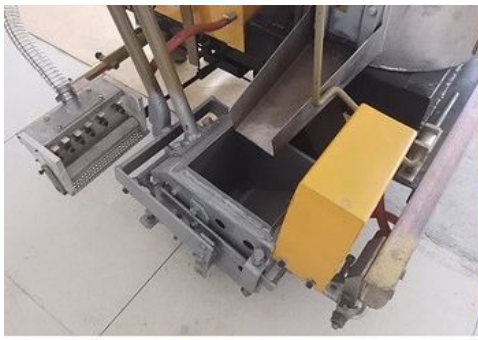

**Shoe**



**Battery Power**

**Construction spot:**



**Convex line marking**



**Horizontal line marking**

**Rita QU**

**Xi'an Wage Traffic Infrastructure Installation Co.,LTD**

Mail: [rita@wagetrain.com](mailto:rita@wagetrain.com), [wagetrain@hotmail.com](mailto:wagetrain@hotmail.com)

Cell/ Whatsapp: +86 15591818803 Web: [www.wagetrain.com](http://www.wagetrain.com)



**Xian WAGE Traffic Infrastructure Installation Co., Ltd.**



+86 15591818803



[rita@wagetrain.com](mailto:rita@wagetrain.com)



[wagetrain.com](http://wagetrain.com)

Room 401, Unit 2, Building 2, Shenglong Plaza, Weiyang Road, Xi'an, 710016, Shaanxi, China

